


STAINLESS STEEL WELDING COATED

STRAIGHT DUCT

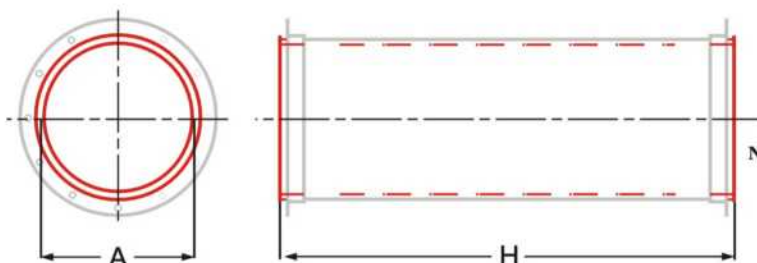

NOTE: 1) T.H. Will manufacture the stainless steel duct and fitting to the following standard .


2) T.H. Can cut down on field joints or connect with welding to conform to the custom fabricated lengths.

產品規格

MODEL	A OD DLAMETER (mm)	H NOMINAL LENGTH (mm)	T DUCT THICKNESS (mm)	FLANGE TYPE
SC-SD-0100	102	1220/2450	0.8	FLAT FLANGE
SC-SD-0150	152			
SC-SD-0200	203			
SC-SD-0250	253			
SC-SD-0300	300		1.0	VAN STONE FLANGE
SC-SD-0350	350			
SC-SD-0400	400			
SC-SD-0450	450			
SC-SD-0500	500		1.2	
SC-SD-0550	550			
SC-SD-0600	600			
SC-SD-0650	650			
SC-SD-0700	700			
SC-SD-0750	750			
SC-SD-0800	800		2.0	
SC-SD-0900	900			
SC-SD-1000	1000			
SC-SD-1100	1100			
SC-SD-1200	1200			
SC-SD-1300	1300			
SC-SD-1400	1400			
SC-SD-1500	1500			
SC-SD-1600	1600			
SC-SD-1800	1800			
SC-SD-2000	2000			
SC-SD-2200	2200			
SC-SD-2400	2400			
SC-SD-2500	2500			
SC-SD-3000	3000			
SC-SD-0000	FREE		FREE	NOR

STAINLESS STEEL WELDING COATED

90 DEGREE ELBOW(1)

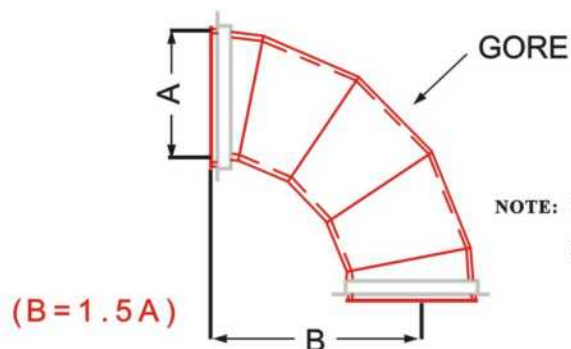


NOTE: 1)T.H. Standard size elbow radius shown following.

2)T.H. Can manufacture the elbow fitting to any radius length.

MODEL	B RADIUS (mm)	DEGREE (°)	N GORE (ps)	A OD DIAMETER (mm)	T DUCT THICKNESS (mm)
SC-90EL-0300	B = 1.5 A	90°	5	300	1.0
SC-90EL-0350				350	
SC-90EL-0400				400	
SC-90EL-0450				450	
SC-90EL-0500				500	
SC-90EL-0550			7	550	1.2
SC-90EL-0600				600	
SC-90EL-0650				650	
SC-90EL-0700				700	
SC-90EL-0750				750	
SC-90EL-0800				800	
SC-90EL-0900				900	
SC-90EL-1000				1000	
SC-90EL-1100				1100	2.0
SC-90EL-1200				1200	
SC-90EL-1300				1300	
SC-90EL-1400				1400	
SC-90EL-1500				1500	
SC-90EL-1600				1600	
SC-90EL-1800				1800	
SC-90EL-2000				2000	
SC-90EL-2200				2200	
SC-90EL-2400				2400	
SC-90EL-0000	NOR		FREE	FREE	NOR

STAINLESS STEEL WELDING COATED

90 DEGREE ELBOW (2)

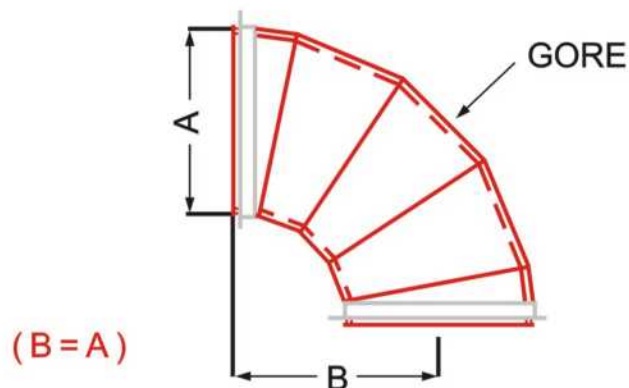


NOTE: 1) T.H. Standard size elbow radius shown following.

2) T.H. Can manufacture the elbow fitting to any radius length.

MODEL	B RADIUS (mm)	DEGREE (°)	N GORE (ps)	A OD DIAMETER (mm)	T DUCT THICKNESS (mm)
SC-90EM-0300	B = A	90°	5	300	1.0
SC-90EM-0350				350	
SC-90EM-0400				400	
SC-90EM-0450				450	
SC-90EM-0500				500	
SC-90EM-0550				550	
SC-90EM-0600				600	1.2
SC-90EM-0650				650	
SC-90EM-0700				700	
SC-90EM-0750				750	
SC-90EM-0800				800	
SC-90EM-0900				900	
SC-90EM-1000				1000	
SC-90EM-1100			7	1100	2.0
SC-90EM-1200				1200	
SC-90EM-1300				1300	
SC-90EM-1400				1400	
SC-90EM-1500				1500	
SC-90EM-1600				1600	
SC-90EM-1800				1800	
SC-90EM-2000				2000	
SC-90EM-2200				2200	
SC-90EM-2400				2400	
SC-90EM-0000	NOR		FREE	FREE	NOR

STAINLESS STEEL WELDING COATED

60 DEGREE ELBOW

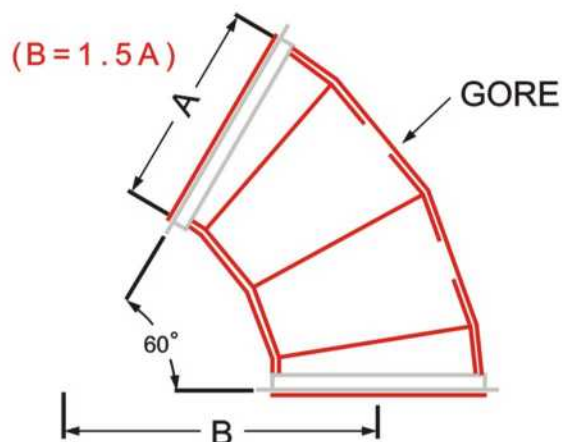


- NOTE: 1)T.H. Standard size elbow radius shown following.
 2)T.H. Can manufacture the elbow fitting to any radius length.
 3)T.H. Also can manufacture any other degree elbows.

MODEL	B RADIUS (mm)	DEGREE (°)	N GORE (ps)	A OD DIAMETER (mm)	T DUCT THICKNESS (mm)
SC-60EL-0300	B = 1.5 A	60°	3	300	1.0
SC-60EL-0350				350	
SC-60EL-0400				400	
SC-60EL-0450				450	
SC-60EL-0500				500	
SC-60EL-0550				550	1.2
SC-60EL-0600				600	
SC-60EL-0650				650	
SC-60EL-0700				700	
SC-60EL-0750				750	
SC-60EL-0800				800	
SC-60EL-0900				900	
SC-60EL-1000				1000	
SC-60EL-1100			4	1100	2.0
SC-60EL-1200				1200	
SC-60EL-1300				1300	
SC-60EL-1400				1400	
SC-60EL-1500				1500	
SC-60EL-1600				1600	
SC-60EL-1800				1800	
SC-60EL-2000				2000	
SC-60EL-2200				2200	
SC-60EL-2400				2400	
SC-60EL-0000	NOR		FREE	FREE	NOR

STAINLESS STEEL WELDING COATED

45 DEGREE ELBOW (1)

(B = 1.5 A)

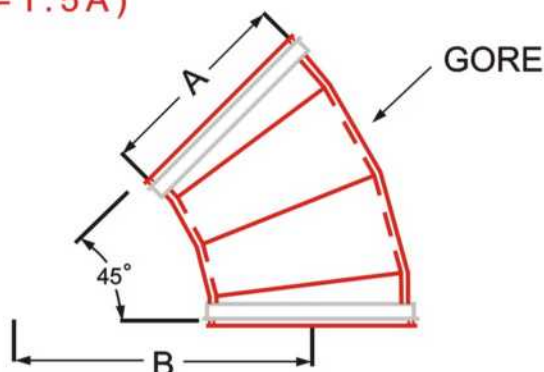


NOTE: 1) T.H. Standard size elbow radius shown following.

2) T.H. Can manufacture the elbow fitting to any radius length.

MODEL	B RADIUS (mm)	DEGREE (°)	N GORE (ps)	A OD DIAMETER (mm)	T DUCT THICKNESS (mm)
SC-45EL-0300	B = 1.5 A	45°	3	300	1.0
SC-45EL-0350				350	
SC-45EL-0400				400	
SC-45EL-0450				450	
SC-45EL-0500				500	
SC-45EL-0500				550	1.2
SC-45EL-0600				600	
SC-45EL-0650				650	
SC-45EL-0700				700	
SC-45EL-0750				750	
SC-45EL-0800				800	
SC-45EL-0900				900	
SC-45EL-1000				1000	
SC-45EL-1100			4	1100	2.0
SC-45EL-1200				1200	
SC-45EL-1300				1300	
SC-45EL-1400				1400	
SC-45EL-1500				1500	
SC-45EL-1600				1600	
SC-45EL-1800				1800	
SC-45EL-2000				2000	
SC-45EL-2200				2200	
SC-45EL-2400				2400	
SC-45EL-0000	NOR		FREE	FREE	NOR

STAINLESS STEEL WELDING COATED

45 DEGREE ELBOW (2)

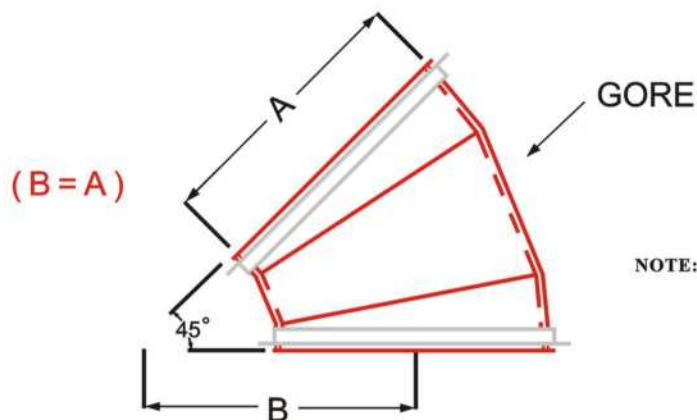


NOTE: 1)T.H. Standard size elbow radius shown following.

2)T.H. Can manufacture the elbow fitting to any radius length.

MODEL	B RADIUS (mm)	DEGREE (°)	N GORE (ps)	A OD DIAMETER (mm)	T DUCT THICKNESS (mm)
SC-45EM-0300	B = A	45°	3	300	1.0
SC-45EM-0350				350	
SC-45EM-0400				400	
SC-45EM-0450				450	
SC-45EM-0500				500	
SC-45EM-0550				550	1.2
SC-45EM-0600				600	
SC-45EM-0650				650	
SC-45EM-0700				700	
SC-45EM-0750				750	
SC-45EM-0800				800	
SC-45EM-0900				900	
SC-45EM-1000				1000	
SC-45EM-1100			5	1100	2.0
SC-45EM-1200				1200	
SC-45EM-1300				1300	
SC-45EM-1400				1400	
SC-45EM-1500				1500	
SC-45EM-1600				1600	
SC-45EM-1800				1800	
SC-45EM-2000				2000	
SC-45EM-2200				2200	
SC-45EM-2400				2400	
SC-45EM-0000	NOR		FREE	FREE	NOR

STAINLESS STEEL WELDING COATED

30 DEGREE ELBOW

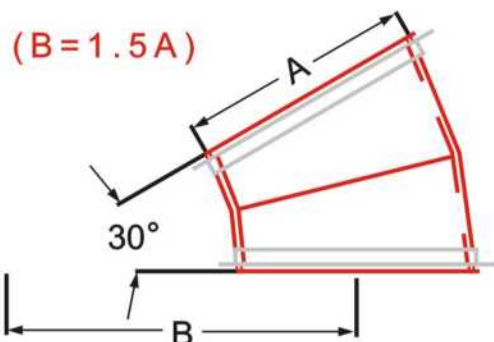

NOTE: 1) T.H. Standard size elbow radius shown following.

2) T.H. Can manufacture the elbow fitting to any radius length.


3) T.H. Also can manufacture any other degree elbows.

產品規格

MODEL	B RADIUS (mm)	DEGREE (.)	N GORE (ps)	A OD DIAMETER (mm)	T DUCT THICKNESS (mm)
SC-30EL-0300	B = 1.5 A	30°	2	300	1.0
SC-30EL-0350				350	
SC-30EL-0400				400	
SC-30EL-0450				450	
SC-30EL-0500				500	
SC-30EL-0550				550	1.2
SC-30EL-0600				600	
SC-30EL-0650				650	
SC-30EL-0700				700	
SC-30EL-0750				750	
SC-30EL-0800				800	
SC-30EL-0900				900	
SC-30EL-1000				1000	2.0
SC-30EL-1100				1100	
SC-30EL-1200				1200	
SC-30EL-1300				1300	
SC-30EL-1400				1400	
SC-30EL-1500				1500	
SC-30EL-1600				1600	
SC-30EL-1800				1800	
SC-30EL-2000				2000	
SC-30EL-2200				2200	
SC-30EL-2400				2400	
SC-30EL-0000	NOR		FREE	FREE	NOR

STAINLESS STEEL WELDING COATED


90 DEGREE SHAPING ELBOW

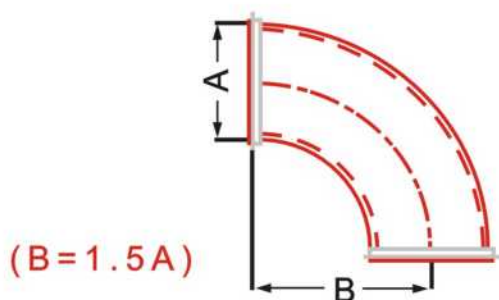

MODEL	B RADIUS (mm)	DEGREE (°)	A OD DIAMETER (mm)	T DUCT THICKNESS (mm)
SC-90EN-0100	B = 1.5 A	90°	102	1.0
SC-90EN-0150			152	
SC-90EN-0200			203	
SC-90EN-0250			253	

STAINLESS STEEL WELDING COATED



45 DEGREE SHAPING ELBOW

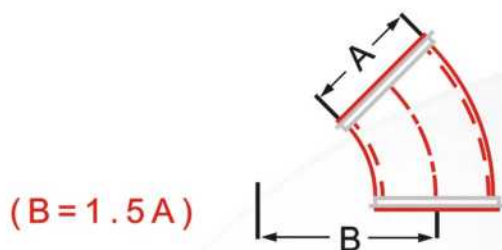

MODEL	B RADIUS (mm)	DEGREE (°)	A OD DIAMETER (mm)	T DUCT THICKNESS (mm)
SC-45EN-0100	B = 1.5 A	45°	102	1.0
SC-45EN-0150			152	
SC-45EN-0200			203	
SC-45EN-0250			253	

STAINLESS STEEL WELDING COATED

VOLUM DAMPER




The V.D diameter dimensions are less than 10" such as picture. A dimension greater than 12" have divided into two parts the one is airtight damper and another is standard.

MODEL	A OD DIAMETER (mm)	H NOMINAL LENGHT (mm)	T DUCT THICKNESS (mm)	BLADE THICK- NESS (mm)	C SHAFT DIM (mm)
SC-VD-0100	102	120	0.8	1.0	9
SC-VD-0150	152	170			
SC-VD-0200	203	220			
SC-VD-0250	253	270			
SC-VD-0300	300	300	1.0	2.0	19
SC-VD-0350	350				
SC-VD-0400	400				
SC-VD-0450	450				
SC-VD-0500	500		1.2	3.0	25
SC-VD-0550	550				
SC-VD-0600	600				
SC-VD-0650	650				
SC-VD-0700	700				
SC-VD-0750	750				
SC-VD-0800	800				
SC-VD-0900	900				
SC-VD-1000	1000	400	2.0	3.0	31
SC-VD-1100	1100				
SC-VD-1200	1200				
SC-VD-1300	1300				
SC-VD-1400	1400		2.5	3.0	39
SC-VD-1500	1500				
SC-VD-1600	1600				
SC-VD-1800	1800				
SC-VD-2000	2000				
SC-VD-2200	2200				
SC-VD-2400	2400				
SC-VD-0000	FREE	FREE	FREE	NOR	FREE

STAINLESS STEEL WELDING COATED


VAN STONE FLANGE

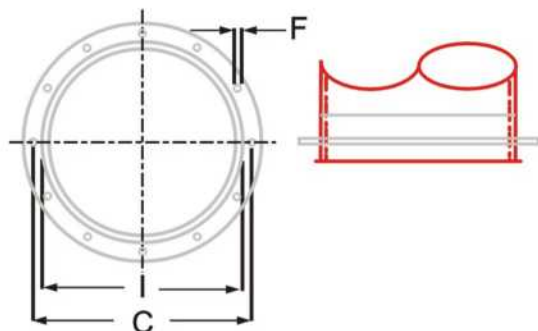

MODEL	I ID DIAMETER (mm)	FLANGE RING WIDTH (mm)	FLANGE THICK- NESS (mm)	N BOLT HOLES (EA)	F HOLE SIZE (mm)	C BOLT CIRCLE (mm)
SC-FL-0100	103	25.4	2	6	7	134
SC-FL-0150	153			8		184
SC-FL-0200	204			8		235
SC-FL-0250	254			10		282
SC-FL-0300	302	32x32	3	10	10	340
SC-FL-0350	352			12		388
SC-FL-0400	402			14		438
SC-FL-0450	452			16		492
SC-FL-0500	502			16		540
SC-FL-0550	552			16		590
SC-FL-0600	602			20		640
SC-FL-0650	652			20		690
SC-FL-0700	702			20		740
SC-FL-0750	752			24		790
SC-FL-0800	802	40x40	4	24	10	850
SC-FL-0900	902			28		950
SC-FL-1000	1002			32		1050
SC-FL-1100	1102			36		1150
SC-FL-1200	1202			40		1250
SC-FL-1300	1302			44		1350
SC-FL-1400	1402	50x50	5	48	12	1450
SC-FL-1500	1502			52		1560
SC-FL-1600	1602			56		1660
SC-FL-1800	1802			64		1860
SC-FL-2000	2002			68		2060
SC-FL-2200	2202			76		2260
SC-FL-2400	2402			76		2460
SC-FL-2500	2502			76		2560
SC-FL-3000	3002	65x65	6	96	12	3077

STAINLESS STEEL WELDING COATED



END - CAP

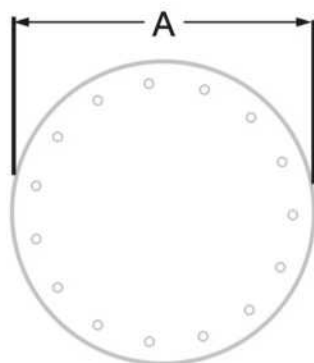

MODEL	A OD DIAMETER (mm)	T FLANGE THICKNESS (mm)	END-CAP TYPE
SC-EC-0100	153	1.0	CAP
SC-EC-0150	204		
SC-EC-0200	254		
SC-EC-0250	298		
SC-EC-0300	362		
SC-EC-0350	412	1.2	
SC-EC-0400	462		
SC-EC-0450	512		
SC-EC-0500	567		
SC-EC-0550	617		
SC-EC-0600	667		
SC-EC-0650	717		
SC-EC-0700	767		
SC-EC-0750	817		2.0
SC-EC-0800	879		
SC-EC-0900	979		
SC-EC-1000	1079		
SC-EC-1100	1179		
SC-EC-1200	1279		
SC-EC-1300	1379		
SC-EC-1400	1479		
SC-EC-1500	1602		
SC-EC-1600	1702		
SC-EC-1800	1902		
SC-EC-2000	2102		
SC-EC-2200	2302		
SC-EC-2400	2502		
SC-EC-0000	FREE	NOR	

STAINLESS STEEL WELDING COATED

OFFSET

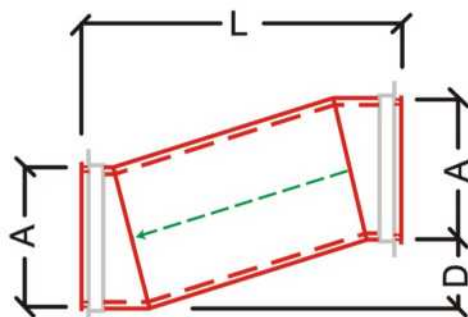


MODEL	A OD DIAMETER (mm)	D LENGTH (mm)	L LENGTH (mm)
SC-OS-0100	102	A.S.	A.S.
SC-OS-0150	152		
SC-OS-0200	203		
SC-OS-0250	253		
SC-OS-0300	300		
SC-OS-0350	350		
SC-OS-0400	400		
SC-OS-0450	450		
SC-OS-0500	500		
SC-OS-0550	550		
SC-OS-0600	600		
SC-OS-0650	650		
SC-OS-0700	700		
SC-OS-0750	750		
SC-OS-0800	800		
SC-OS-0900	900		
SC-OS-1000	1000		
SC-OS-1100	1100		
SC-OS-1200	1200		
SC-OS-1300	1300		
SC-OS-1400	1400		
SC-OS-1500	1500		
SC-OS-1600	1600		
SC-OS-1800	1800		
SC-OS-2000	2000		
SC-OS-2200	2200		
SC-OS-2400	2400		
SC-OS-0000	FREE		

NOTE: 1)A.S. means any size but. L must larger than 2.4D+200.

STAINLESS STEEL WELDING COATED

CONCENTRIC REDUCER


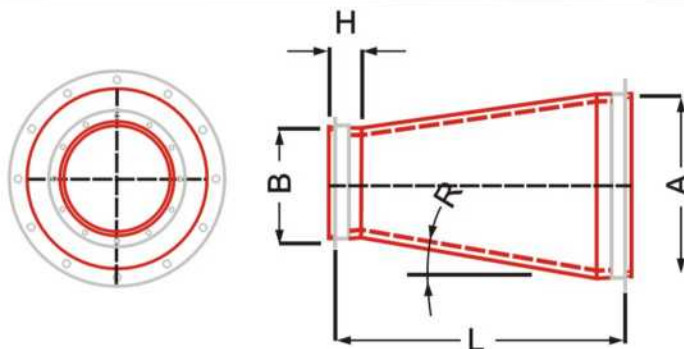


MODEL	A OD DIAMETER (mm)	B OD DIAMETER (mm)	L LENGTH (mm)	H NECK LENGTH (mm)
SC-CR-0100	102	A.S.	B+200	50
SC-CR-0150	152			
SC-CR-0200	203			
SC-CR-0250	253			
SC-CR-0300	300			
SC-CR-0350	350			
SC-CR-0400	400			
SC-CR-0450	450			
SC-CR-0500	500			
SC-CR-0550	550			
SC-CR-0600	600		B+300	100
SC-CR-0650	650			
SC-CR-0700	700			
SC-CR-0750	750			
SC-CR-0800	800			
SC-CR-0900	900			
SC-CR-1000	1000			
SC-CR-1100	1100			
SC-CR-1200	1200			
SC-CR-1300	1300			
SC-CR-1400	1400			
SC-CR-1500	1500			
SC-CR-1600	1600			
SC-CR-1800	1800			
SC-CR-2000	2000			
SC-CR-2200	2200			
SC-CR-2400	2400			
SC-CR-0000	FREE		FREE	A.S.

NOTE: 1)A.S. means any diameter size less than A.
2)R≤20°,IF CANN'T BE,THAT "L" MUST BE LARGEER.

STAINLESS STEEL WELDING COATED

ECCENTRIC REDUCER

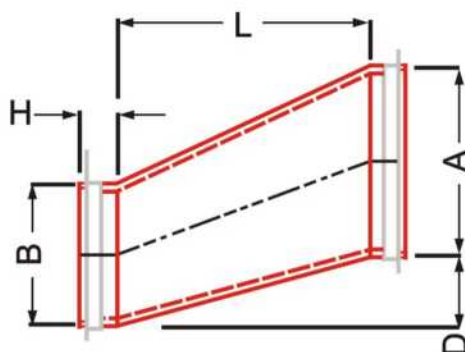

MODEL	A OD DIAMETER (mm)	B OD DIAMETER (mm)	D LENGTH (mm)	L LENGTH (mm)	H NECK LENGTH (mm)
SC-ER-0100	102	A.S.	A.S.	(A-B)/tan 15°	50
SC-ER-0150	152				
SC-ER-0200	203				
SC-ER-0250	253				
SC-ER-0300	300				
SC-ER-0350	350				100
SC-ER-0400	400				
SC-ER-0450	450				
SC-ER-0500	500				
SC-ER-0550	550				
SC-ER-0600	600				
SC-ER-0650	650				
SC-ER-0700	700				
SC-ER-0750	750				
SC-ER-0800	800				
SC-ER-0900	900				
SC-ER-1000	1000				
SC-ER-1100	1100				
SC-ER-1200	1200				
SC-ER-1300	1300				
SC-ER-1400	1400				
SC-ER-1500	1500				
SC-ER-1600	1600				
SC-ER-1800	1800				
SC-ER-2000	2000				
SC-ER-2200	2200				
SC-ER-2400	2400				
SC-ER-0000	FREE			FREE	FREE



NOTE: 1)A.S. means any diameter size less than A.

2)L=(A-B)/tan15MIN

3)"D" also can be zero and reducer will have a flat side

STAINLESS STEEL WELDING COATED

SQUARE TO ROUND TRANSITION

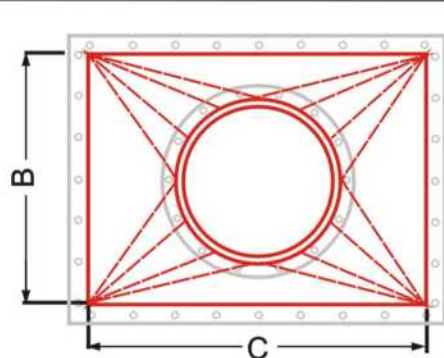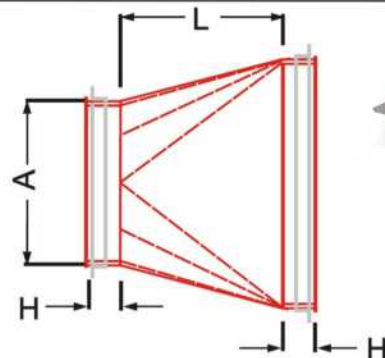


MODEL	A OD DIAMETER (mm)	B DIAMETER (mm)	C LENGTH (mm)	L LENGTH (mm)	H NECK LENGTH (mm)
SC-ST-0100	102	A.S.	A.S.	A.S.	50
SC-ST-0150	152				
SC-ST-0200	203				
SC-ST-0250	253				
SC-ST-0300	300				
SC-ST-0350	350				
SC-ST-0400	400				100
SC-ST-0450	450				
SC-ST-0500	500				
SC-ST-0550	550				
SC-ST-0600	600				
SC-ST-0650	650				
SC-ST-0700	700				
SC-ST-0750	750				
SC-ST-0800	800				
SC-ST-0900	900				
SC-ST-1000	1000				
SC-ST-1100	1100				
SC-ST-1200	1200				
SC-ST-1300	1300				
SC-ST-1400	1400				
SC-ST-1500	1500				
SC-ST-1600	1600				
SC-ST-1800	1800				
SC-ST-2000	2000				
SC-ST-2200	2200				
SC-ST-2400	2400				
SC-ST-0000	FREE				FREE

NOTE: 1)A.S. means any size

STAINLESS STEEL WELDING COATED

BOOT TEE

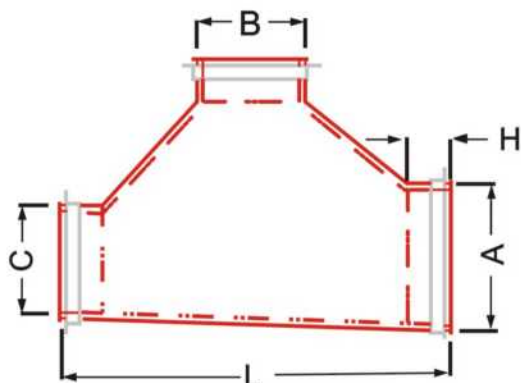



MODEL	A OD DIAMETER (mm)	B OD DIAMETER (mm)	C OD DIAMETER (mm)	L BT LENGTH (mm)	H NECK LENGTH (mm)
SC-BT-0100	102	A.S.	A.S.	A.S.	50
SC-BT-0150	152				
SC-BT-0200	203				
SC-BT-0250	253				
SC-BT-0300	300				
SC-BT-0350	350				100
SC-BT-0400	400				
SC-BT-0450	450				
SC-BT-0500	500				
SC-BT-0550	550				
SC-BT-0600	600				
SC-BT-0650	650				
SC-BT-0700	700				
SC-BT-0750	750				
SC-BT-0800	800				
SC-BT-0900	900				
SC-BT-1000	1000				
SC-BT-1100	1100				
SC-BT-1200	1200				
SC-BT-1300	1300				
SC-BT-1400	1400				
SC-BT-1500	1500				
SC-BT-0000	FREE				FREE

NOTE: 1)A.S. means any diameter size less than A.

2)"A" mean the largest of three diameter and it may be any where of three way.

STAINLESS STEEL WELDING COATED

45 DEGREE WAY


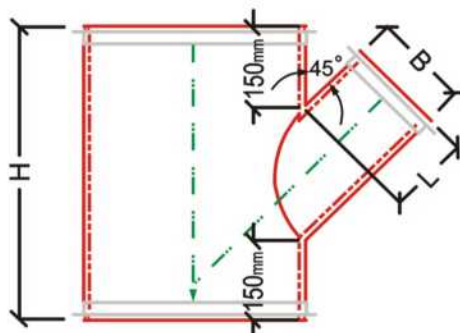


MODEL	A OD DIAMETER (mm)	B OD DIAMETER (mm)	H LENGTH (mm)	L LENGTH (mm)
SC-45DT-□□□□,0100	A.S.	102	MINIMUM 1.414B+300	100
SC-45DT-□□□□,0150		152		150
SC-45DT-□□□□,0200		203		
SC-45DT-□□□□,0250		253		
SC-45DT-□□□□,0300		300		
SC-45DT-□□□□,0350		350		
SC-45DT-□□□□,0400		400		
SC-45DT-□□□□,0450		450		
SC-45DT-□□□□,0500		500		
SC-45DT-□□□□,0550		550		
SC-45DT-□□□□,0600		600		
SC-45DT-□□□□,0650		650		
SC-45DT-□□□□,0700		700		
SC-45DT-□□□□,0750		750		
SC-45DT-□□□□,0800		800		
SC-45DT-□□□□,0900		900		
SC-45DT-□□□□,1000		1000		
SC-45DT-□□□□,1100		1100		
SC-45DT-□□□□,1200		1200		
SC-45DT-□□□□,1300		1300		
SC-45DT-□□□□,1400		1400		
SC-45DT-□□□□,1500		1500		
SC-45DT-□□□□,1600		1600		
SC-45DT-□□□□,1800		1800		
SC-45DT-□□□□,0000		FREE	FREE	FREE

NOTE: 1) A.S. means any diameter size less than B.
2) T.H. can manufacturer any length of H to fitting these custom fabricated lengths ,bus it must be largr than 1.4141A+300.
3) □□□□ means any sizes larger or same than 45DT'S size

STAINLESS STEEL WELDING COATED

60 DEGREE WAY

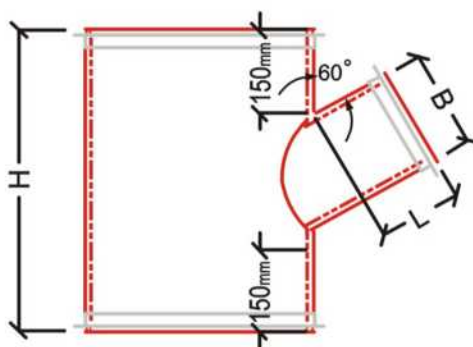

MODEL	A OD DIAMETER (mm)	B OD DIAMETER (mm)	H LENGTH (mm)	L LENGTH (mm)
SC-60DT-□□□□,0100	A.S.	102	MINIMUM 1.155B+300	100
SC-60DT-□□□□,0150		152		
SC-60DT-□□□□,0200		203		
SC-60DT-□□□□,0250		253		
SC-60DT-□□□□,0300		300		
SC-60DT-□□□□,0350		350		
SC-60DT-□□□□,0400		400		
SC-60DT-□□□□,0450		450		
SC-60DT-□□□□,0500		500		
SC-60DT-□□□□,0550		550		
SC-60DT-□□□□,0600		600		
SC-60DT-□□□□,0650		650		
SC-60DT-□□□□,0700		700		
SC-60DT-□□□□,0750		750		
SC-60DT-□□□□,0800		800		
SC-60DT-□□□□,0900		900		
SC-60DT-□□□□,1000		1000		
SC-60DT-□□□□,1100		1100		
SC-60DT-□□□□,1200		1200		
SC-60DT-□□□□,1300		1300		
SC-60DT-□□□□,1400		1400		
SC-60DT-□□□□,1500		1500		
SC-60DT-□□□□,1600		1600		
SC-60DT-□□□□,1800		1800		
SC-60DT-□□□□,0000		FREE	FREE	FREE


NOTE: 1)A.S. means any size larger than B

2)T.H. can manufacturer any length of "H" to fitting these custom fabricated lengths , but it must be largr

3) □□□□ means any sizes larger or same than 60DT'S size

STAINLESS STEEL WELDING COATED

60 DEGREE ONE WAY

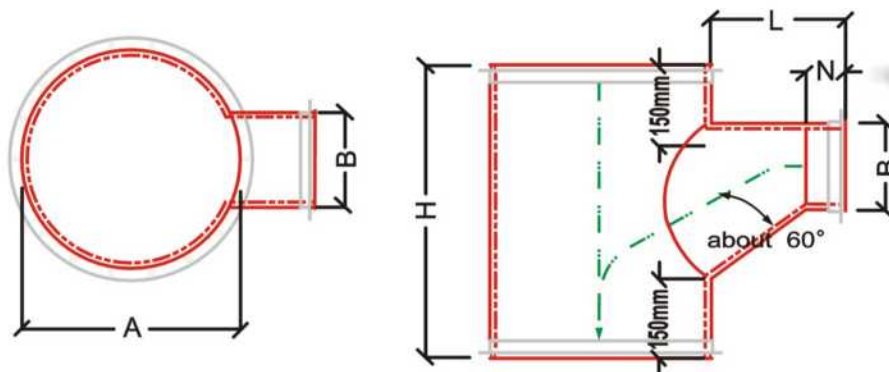

MODEL	A OD DIAMETER (mm)	B OD DIAMETER (mm)	H LENGTH (mm)	L LENGTH (mm)	N NECK LENGHT (mm)
SC-60DT-□□□□,0100	A.S.	102	B+300+ (L-N)/1.732	150	50
SC-60DT-□□□□,0150		152		200	
SC-60DT-□□□□,0200		203		250	
SC-60DT-□□□□,0250		253		300	
SC-60DT-□□□□,0300		300		400	100
SC-60DT-□□□□,0350		350			
SC-60DT-□□□□,0400		400			
SC-60DT-□□□□,0450		450			
SC-60DT-□□□□,0500		500			
SC-60DT-□□□□,0550		550			
SC-60DT-□□□□,0600		600			
SC-60DT-□□□□,0650		650			
SC-60DT-□□□□,0700		700			
SC-60DT-□□□□,0750		750			
SC-60DT-□□□□,0800		800			
SC-60DT-□□□□,0900		900			
SC-60DT-□□□□,1000		1000			
SC-60DT-□□□□,1100		1100			
SC-60DT-□□□□,1200		1200			
SC-60DT-□□□□,1300		1300			
SC-60DT-□□□□,1400		1400			
SC-60DT-□□□□,1500		1500			
SC-60DT-□□□□,1600		1600			
SC-60DT-□□□□,1800		1800			
SC-60DT-□□□□,0000	FREE	FREE	FREE	FREE	



NOTE: 1)A.S. means any diameter size larger than B.

2)T.H. can manufacturer any length of "H" to fitting these custom fabricated lengths ,bus it must be largr than $B+300+(L-H)/1.732$

3) □□□ means any sizes larger or same than 60DT'S size

STAINLESS STEEL WELDING COATED

90 DEGREE WAY

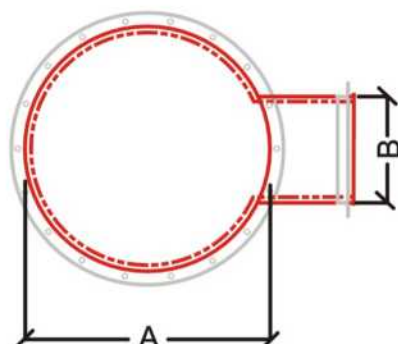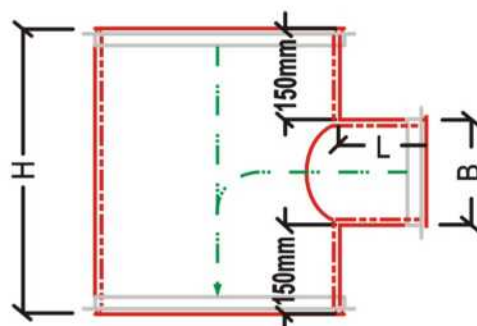

MODEL	A OD DIAMETER (mm)	B OD DIAMETER (mm)	H LENGTH (mm)	L LENGTH (mm)
SC-90DT-□□□□,0100	A.S.	102	B+300	100
SC-90DT-□□□□,0150		152		
SC-90DT-□□□□,0200		203		
SC-90DT-□□□□,0250		253		
SC-90DT-□□□□,0300		300		
SC-90DT-□□□□,0350		350		
SC-90DT-□□□□,0400		400		
SC-90DT-□□□□,0450		450		
SC-90DT-□□□□,0500		500		
SC-90DT-□□□□,0550		550		
SC-90DT-□□□□,0600		600		150
SC-90DT-□□□□,0650		650		
SC-90DT-□□□□,0700		700		
SC-90DT-□□□□,0750		750		
SC-90DT-□□□□,0800		800		
SC-90DT-□□□□,0900		900		
SC-90DT-□□□□,1000		1000		
SC-90DT-□□□□,1100		1100		
SC-90DT-□□□□,1200		1200		
SC-90DT-□□□□,1300		1300		
SC-90DT-□□□□,1400		1400		
SC-90DT-□□□□,1500		1500		
SC-90DT-□□□□,1600		1600		
SC-90DT-□□□□,1800		1800		
SC-90DT-□□□□,0000		FREE	FREE	FREE


NOTE: 1)A.S. means any size larger or same than B.

2)T.H. can manufacture any length of "H" to fitting these custom fabricated lengths ,bus it must be larger than B+300

3) □□□□ means any sizes larger or same than 90DT'S size

STAINLESS STEEL WELDING COATED

CONICAL WAY

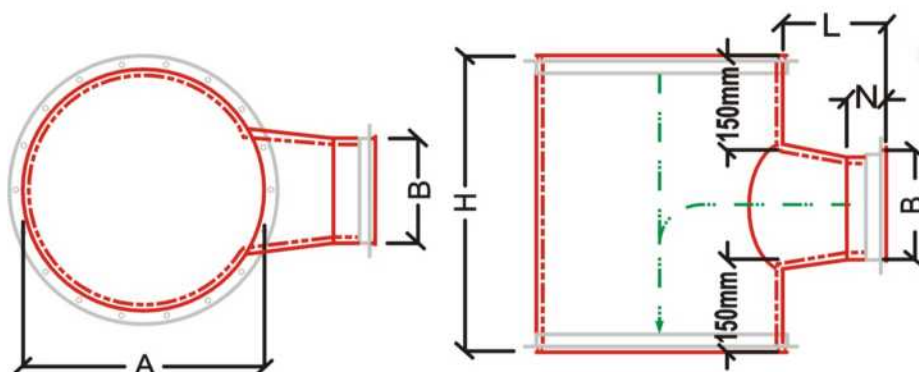

MODEL	A OD DIAMETER (mm)	B OD (mm)	H LENGTH (mm)	L LENGTH (mm)	N NECK LENGHT (mm)
SC-CT- [] [] [] [] ,0100	A.S.	102	B+375	150	50
SC-CT- [] [] [] [] ,0150		152		200	
SC-CT- [] [] [] [] ,0200		203		250	
SC-CT- [] [] [] [] ,0250		253		300	
SC-CT- [] [] [] [] ,0300		300		450	100
SC-CT- [] [] [] [] ,0350		350			
SC-CT- [] [] [] [] ,0400		400			
SC-CT- [] [] [] [] ,0450		450			
SC-CT- [] [] [] [] ,0500		500			
SC-CT- [] [] [] [] ,0550		550			
SC-CT- [] [] [] [] ,0600		600			
SC-CT- [] [] [] [] ,0650		650			
SC-CT- [] [] [] [] ,0700		700			
SC-CT- [] [] [] [] ,0750		750			
SC-CT- [] [] [] [] ,0800		800			
SC-CT- [] [] [] [] ,0900		900			
SC-CT- [] [] [] [] ,1000		1000			
SC-CT- [] [] [] [] ,1100		1100			
SC-CT- [] [] [] [] ,1200		1200		500	
SC-CT- [] [] [] [] ,1300		1300			
SC-CT- [] [] [] [] ,1400		1400			
SC-CT- [] [] [] [] ,1500		1500			
SC-CT- [] [] [] [] ,1600		1600			
SC-CT- [] [] [] [] ,1800		1800			
SC-CT- [] [] [] [] ,0000		FREE	FREE	FREE	FREE


NOTE: 1)A.S. means any size larger than B+100

2)T.H. can manufacter any length of "H"& "L" to fitting these custom fabricated lengths . but "H" must be larger than B+375.

3) [] [] [] [] means any sizes larger or same than (CT+100)'S size

STAINLESS STEEL WELDING COATED

60 DEGREE REDUCING WYE

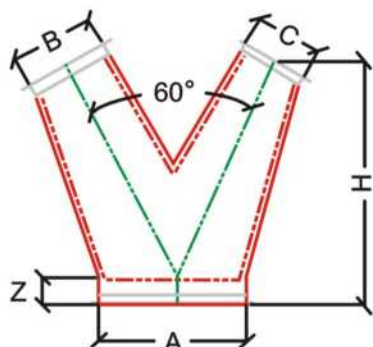

MODEL	A OD DIAMETER (mm)	B OD	C LENGTH (mm)	H LENGTH (mm)	N NECK LENGHT (mm)
SC-60RW-□□□□,0100	102	A.S.	A.S.	A+300	50
SC-60RW-□□□□,0150	152				100
SC-60RW-□□□□,0200	202				
SC-60RW-□□□□,0250	252				
SC-60RW-□□□□,0300	302				
SC-60RW-□□□□,0350	352				
SC-60RW-□□□□,0400	402				
SC-60RW-□□□□,0450	452				
SC-60RW-□□□□,0500	502				
SC-60RW-□□□□,0550	552				
SC-60RW-□□□□,0600	602				
SC-60RW-□□□□,0650	652				
SC-60RW-□□□□,0700	702				
SC-60RW-□□□□,0750	752				
SC-60RW-□□□□,0800	802				
SC-60RW-□□□□,0900	902				
SC-60RW-□□□□,1000	1002				
SC-60RW-□□□□,1100	1102				
SC-60RW-□□□□,1200	1202				
SC-60RW-□□□□,1300	1302				
SC-60RW-□□□□,1400	1402				
SC-60RW-□□□□,1500	1502				
SC-60RW-□□□□,1600	1602				
SC-60RW-□□□□,1800	1802				
SC-60RW-□□□□,0000	FREE			FREE	FREE


NOTE: 1) A.S. means any size larger than B+100.

2) T.H. can manufacturer any length of "H" & "L" to fitting these custom fabricated lengths ,bus "H" must be larger than A+300.

3) □□□□ means any sizes larger than (RW+100)'S size

STAINLESS STEEL WELDING COATED

MOTOR DAMPER

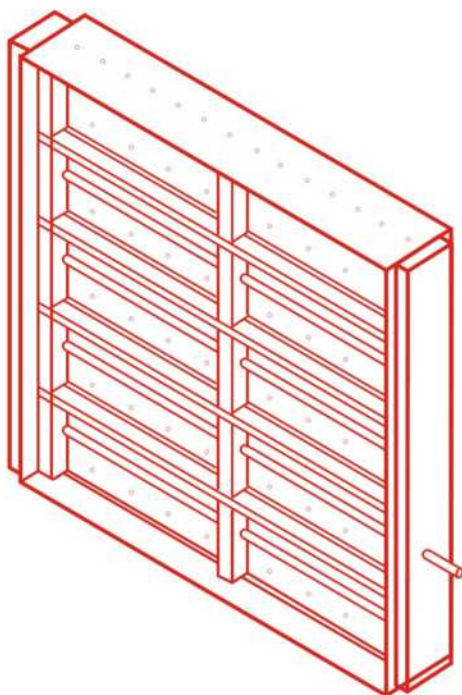

Product Name: Airtight Damper (Motor / Manual)

Material: 1. Case: SUS 304
2. Blade: SUS 304
3. Bolts: Titanium
4. Gasket: PTFE
5. Packing: Silica


Condition: SUS 304 Coated ECTFE for Toxic/ Acid/ Alkali
SUS 304 for General/ Solvent

This damper may be used for smoke removal in special purpose areas when properly designed and sized. Buyer can determine the suitability of duct system for specific corrosive. Also we can product special size for buyer.

MODEL	DIMENSION (mm)	DEPTH (mm)	T-DUCT THICKENSS (mm)	BLADE (mm)	SHAFT (mm)
SC-MD-0300	300x300	250	1.2	1	19
SC-MD-0400	400x400	250	1.2	1	19
SC-MD-0500	500x500	250	1.2	2	19
SC-MD-0600	600x600	250	1.2	2	19
SC-MD-0700	700x700	250	1.2	3	19
SC-MD-0800	800x800	250	1.2	3	19
SC-MD-0900	900x900	250	1.2	3	19
SC-MD-1000	1000x1000	250	1.2	5	19
SC-MD-1100	1100x1100	250	1.5	5	19
SC-MD-1200	1200x1200	250	1.5	5	19
SC-MD-1300	1300x1300	250	1.5	5	19
SC-MD-1400	1400x1400	250	1.5	5	19
SC-MD-1800	1800x1800	250	1.5	6	19
SC-MD-2000	2000x2000	250	1.5	6	19
SC-MD-0000	FREE	FREE	NOR	NOR	FREE

STAINLESS STEEL WELDING COATED

CHECK DAMPER

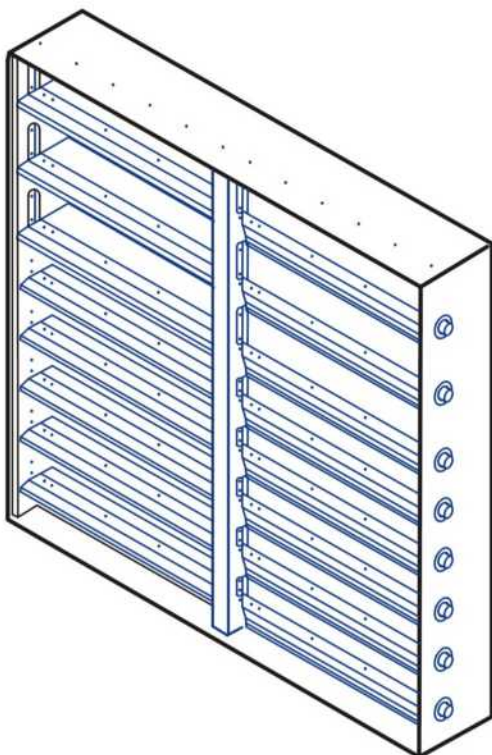

Product Name : Check Damper

Material : SUS 304

This damper is specifically designed for protection against blast and instantaneous pressure changes. Applications include possible explosions from storage areas containing volatile materials, building de-pressurization from duct protection.



產品規格

MODEL	DIMENSION (mm)	DEPTH (mm)	T-DUCT THICKENSS (mm)	BLADE (mm)	SHAFT (mm)
SC-CD-0300	300x300	250	0.8	2	12
SC-CD-0400	400x400	250	0.8	2	12
SC-CD-0550	550x550	250	0.8	3	12
SC-CD-0600	600x600	250	0.8	3	12
SC-CD-0700	700x700	250	0.8	4	12
SC-CD-0800	800x800	250	0.8	4	12
SC-CD-0900	900x900	250	0.8	5	12
SC-CD-1000	1000x1000	250	1.0	5	12
SC-CD-1100	1100x1100	250	1.0	14	12
SC-CD-1200	1200x1200	250	1.0	14	12
SC-CD-1300	1300x1300	250	1.0	16	12
SC-CD-1400	1400x1400	250	1.0	16	12
SC-CD-1800	1800x1800	250	1.0	18	12
SC-CD-2000	2000x2000	250	1.0	18	12

Multiple section dampers are available in unlimited suzes.

STAINLESS STEEL WELDING COATED

PEDESTAL-TEE

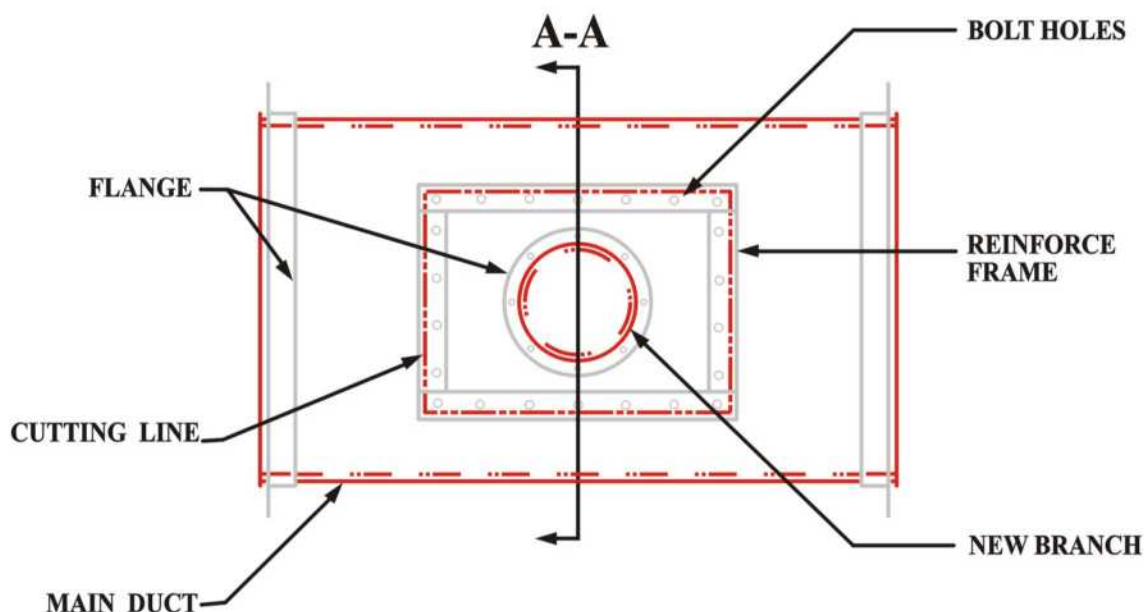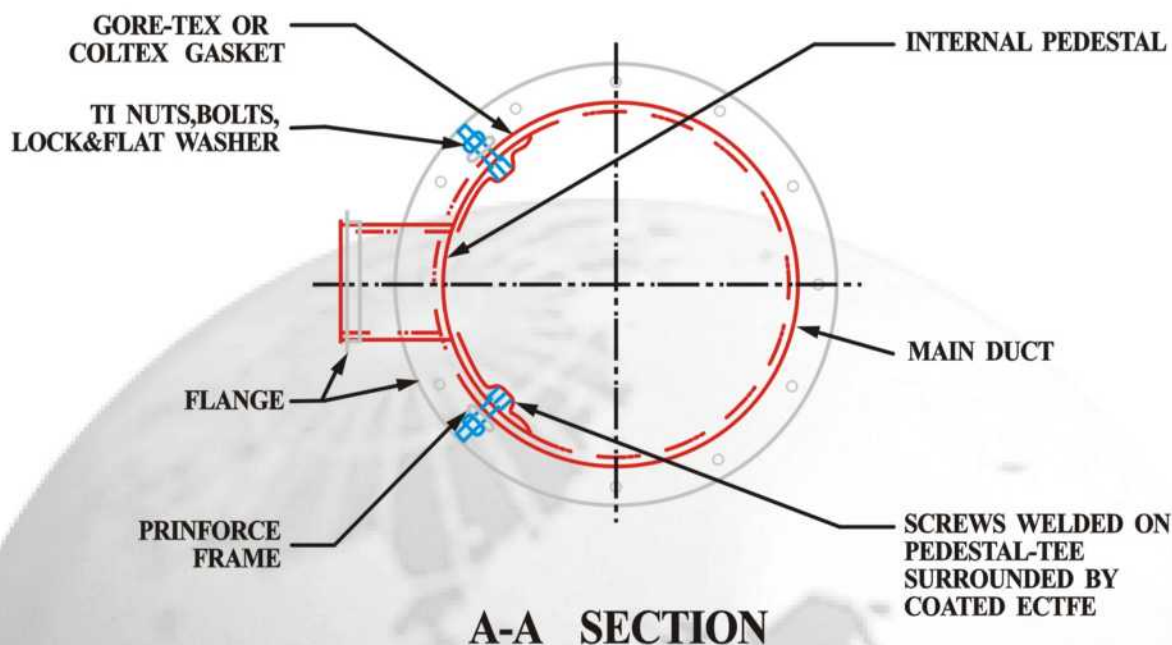

NOTE: PEDESTAL-TEE CAN ADD A NEW BRANCH ON EXTANT EXHAUST WITHOUT SHUTTING DOWN THE EXHAUST SYSTEM, AND PEDESTAL-TEE'S DIAMETER MUST BE LESS THAN HALF MAIN DUCT DIAMETER.

STAINLESS STEEL WELDING COATED

FLANGE JOINT

